
Digital LED magic ball specification

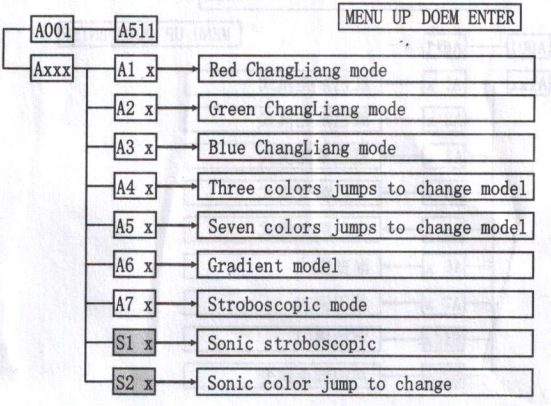

DMX512 control:

channel	Channel value	Functional description
CH1	0	No stroboscopic effects
	1-255	LED stroboscopic, speed by slow to fast
CH2	0	Red LED put out
	1-255	Red LED light by dark gradually bright brightness
CH3	0	Green LED put out
	1-255	Green LED light by dark gradually bright brightness
CH4	0	The blue LED to go out
	1-255	The blue LED light by dark gradually bright brightness
CH5	0-127	Motor position
	128-191	Motor rotation is infinite, speed by fast to slow
	192-255	Motor reverse infinite rotation, speed by fast to slow
CH6	0	CH1 to CH5 role
	10-37	Au01
	38-65	Au02
	66-93	Au03
	.....	S2 x